

ALU-SMART

The small and adaptable parasol




Glatz 


ALU-SMART



Frame	6 or 8 parts Pole Ø 35 mm Function: Easy to open without button thanks to runner, stepless height adjustment 40–60 cm, tilting in both directions to 32° Ideal for balconies Canopy self-tensing through flexible rib ends Frame roof: round, square, rectangular
Frame colour	Natural anodised aluminium
Canopy	Fabric quality 5: polyacrylic, 300 g/m², UV protection > 98 % Fabric quality 4: polyester, 250 g/m², UV protection > 98 % Fabric quality 2: polyester, 220 g/m², UV protection > 98 %
Flounce	Only available without
Protective cover	Can be ordered as an optional extra
Electrical accessories	Osyron Spot LED with integrated battery pack



Using Locations



Fixations



ALU-SMART,
Int. Patents reg. © Int. Design reg.



Assortment

	Nominal size without flounce	Number of ribs	Order no. Frame anodised natural
	cm		
	Ø 200	6 parts	206 00 200 171
	Ø 220	8 parts	206 00 220 171
	Ø 250	8 parts	206 00 250 171
	Ø 300	8 parts	206 00 300 171
	200×200	8 parts	206 00 201 171
	240×240	8 parts	206 00 241 171
	210×150	6 parts	206 00 212 171
	250×200	6 parts	206 00 252 171



Nominal size	Lateral distance	Pole Ø	Area covered	Height closed	Clear headroom	Total height	Clearance height, parasol part inclined	Total height, parasol inclined	Foundation	Minimum weight for base	max. wind speed open perm.
cm	cm	cm	m²	cm	cm	cm	cm	cm	cm	kg	km/h (wind force)
A	AS	M	B	E	F	G	K	L	C		
Ø 200	175	3.5	2.6	70...130	150...210	180...240	95...155	200...260	40×40	30	75 (9)
Ø 220	205	3.5	3.4	65...125	150...210	180...240	90...150	205...265	40×40	30	65 (8)
Ø 250	230	3.5	4.4	50...110	150...210	185...245	80...140	217...275	50×50	40	50 (7)
Ø 300	275	3.5	6.4	50...90	170...210	210...250	85...125	245...285	60×60	40	35 (5)
200×200	-	3.5	4.0	35...95	150...210	185...245	95...155	200...260	40×40	40	50 (7)
240×240	-	3.5	5.8	30...70	170...210	210...250	100...140	230...270	50×50	40	40 (6)
210×150	-	3.5	3.2	50...110	150...210	185...245	110...170	190...250	40×40	30	55 (7)
250×200	-	3.5	5.0	40...80	170...210	210...250	110...150	220...260	50×50	40	40 (6)

The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).


Height dimensions are based on ground socket BT. These vary slightly depending on the type of base. Except for steel base minus 5 cm.

The max. wind speed limits as per our separate sheet apply only if the parasol canopy is in a horizontal position and if there is a fix ground anchorage.


In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.

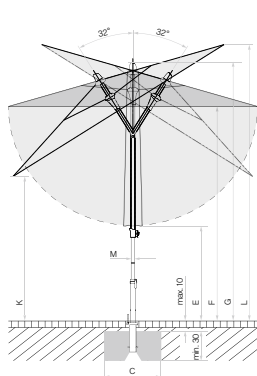


6 parts



8 parts



8 parts



6 parts

Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), Guarantee water drainage



1



2



3



4



5



6



7



8



9



10

Accessories

Absolutely
necessary

Order no.

Protective cover made of coated, tear-resistant polyester fabric

1	Protective cover with zip and rod		350 01 609 980
	10 pieces, protective cover with zip and rod		350 01 609 974

Electrical accessories

2	OSYRION Spot LED battery-powered light, set of 2, with remote control, including charger		350 01 563 000
3	OSYRION Spot LED battery-powered light, set of 4, with remote control, including charger		350 01 563 100

Fixations

Ground sockets

4	Ground socket BT, galvanised steel	Connection tube BT	350 01 206 100
---	------------------------------------	--------------------	----------------

Wall consoles

5	Wall bracket Z, 180 mm, galvanised steel	Support tube Z	350 01 205 000
---	--	----------------	----------------

Bases

6	Concrete base Z, 30 kg, Ø 47 × 8.5 cm	Support tube Z	350 01 109 532
6	Concrete base Z, 40 kg, Ø 60 × 8.5 cm	Support tube Z	350 01 109 529
	1 pallet (20 pieces) concrete base Z, 40 kg, Ø 60 × 8.5 cm	Support tube Z	350 01 109 533
7	Steel base Z 40 kg, 58.5 × 58.5 × 2 cm, galvanised steel	Support tube Z	350 01 100 210

Bases with castors

8	³ Base frame with castors 45 kg, 50 × 50 × 12 cm, incl. cover in black, with support tube Ø 35 / 38–39 mm, polished aluminium (Base frame approx. 13 kg)	Weight Set	350 01 102 300
	Weight Set for base with castors 45 kg, 4 pieces, concrete, (Weight Set approx. 32 kg)		350 01 103 300
	Protective cover for base with castors 45 kg		350 01 602 300
9	³ Natural granite base Z, 40 kg, 45 × 45 × 8 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 465
9	³ Natural granite base Z, 55 kg, 55 × 55 × 9 cm, natural stone, with castors and retractable handle	Support tube Z	350 01 109 445
10	³ Base with castors Z, 55 kg, 65 × 65 × 11 cm, light concrete (without decorative plate) NEW	Support tube Z + Decorative plate	350 01 110 000
	Decorative plate in grey for base with castors Z, 55 kg, plastic NEW		350 01 110 110
	Decorative plate in anthracite for base with castors Z, 55 kg, plastic NEW		350 01 110 120
	Decorative plate in sand for base with castors Z, 55 kg, plastic NEW		350 01 110 130
11	^{1,3} Base with castors Z, 55 kg, 65 × 65 × 11 cm, cast concrete decor	Support tube Z	350 01 102 900
	^{1,3} 1 pallet (5 pieces) base with castors Z, 55 kg, Ø 65 × 65 × 11 cm, cast concrete decor	Support tube Z	350 01 102 950

Support tubes/Connection tubes

12	Support tube Z, Ø 35 / 38–39 mm, galvanised steel		350 01 201 010
12	Support tube Z, Ø 35 / 38–39 mm, high-grade steel 1.4301 / 304		350 01 201 100
13	Connection tube BT, Ø 35 / 38–39 mm, galvanised steel		350 01 206 210

Various fixation types

14	Lawn spike Z, 85 × 150 × 350 mm, galvanised steel	Support tube Z	350 01 205 400
15	Wall consoles U for the table top, Ø 31–40 mm, high-grade steel 1.4301 / 304, for horizontal flat railing, square profile up to 120 mm		350 01 252 005

¹ while stocks last

³ only suitable for smooth, joint free surface coverings



11

12

13

14

15





Glatz AG
Parasols
2023 Season

glatz.com

